

# General-purpose dual line amplifier

## BA3118L

The BA3118L is a dual-channel line amplifier with a flat frequency characteristic. It has been designed for use in radio cassette players and car stereos.

The feedback resistors are all on the chip, which reduces the number of external components required and simplifies PCB design. The gain can be set to one of 10 gain settings from 6dB to 20dB (6dB, 8dB, 10dB, 10.9dB, 12.4dB, 13.4dB, 15.1dB, 16dB, 17.9dB and 20dB), and external fine trimming is possible.

### ●Applications

Car stereos and radio cassette players

### ●Features

- 1) 10 gain settings over the range 6dB to 20dB (max. step 2dB) without external resistors.
- 2) Low distortion.
- 3) Good crosstalk characteristics.
- 4) Low noise.
- 5) Flat frequency characteristic.
- 6) Two channels on one chip allows compact set design.
- 7) Pin 9 is not connected which simplifies the PBC GND design.
- 8) Built-in feedback resistors reduces the number of external components required.
- 9) Low gain variance between the two channels.

### ●Absolute maximum ratings (Ta = 25°C)


Parameter	Symbol	Limits	Unit
Power supply voltage	V <sub>CC</sub>	18	V
Power dissipation	P <sub>d</sub>	400*1	mW
Operating temperature	T <sub>opr</sub>	-25~+85	°C
Storage temperature	T <sub>stg</sub>	-55~+125	°C

\*1 Reduced by 4.0mW for each increase in Ta of 1°C over 25°C.

### ●Recommended operating conditions (Ta = 25°C)

Parameter	Symbol	Min.	Typ.	Max.	Unit
Power supply voltage	V <sub>CC</sub>	4	—	16	V

●Block diagram

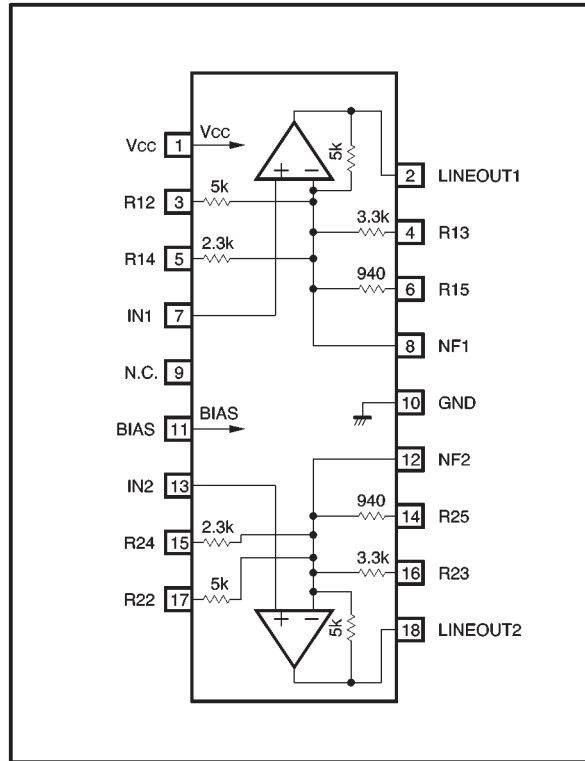

●Electrical characteristics (unless otherwise noted, T<sub>a</sub> = 25°C, V<sub>CC</sub> = 8.0V, f = 1kHz and G<sub>VC</sub> = 20dB)

Parameter	Symbol	Min.	Typ.	Max.	Unit	Conditions
Quiescent current	I <sub>Q</sub>	—	3.8	5.6	mA	V <sub>IN</sub> =0V <sub>rms</sub>
Closed loop voltage gain	G <sub>VC</sub>	19	20	21	dB	V <sub>IN</sub> =-20dBm, DIN AUDIO
Maximum output voltage	V <sub>OM</sub>	1.1	1.9	—	V <sub>rms</sub>	THD=1%, BPF400~30kHz
Total harmonic distortion	THD	—	0.017	0.15	%	V <sub>O</sub> =0dBm, R <sub>L</sub> =30kΩ
Input conversion noise voltage	V <sub>NIN</sub>	—	1.1	2.1	μV <sub>rms</sub>	V <sub>IN</sub> =0V <sub>rms</sub> , R <sub>g</sub> =0Ω, DIN AUDIO
Interchannel crosstalk	CT	—	-92	-72	dB	V <sub>O</sub> =0dBm, R <sub>L</sub> =30kΩ
Input resistance	R <sub>IN</sub>	30	45	60	kΩ	V <sub>IN</sub> =0.1V <sub>rms</sub>
Ripple rejection ratio	RR	35	44	—	dB	V <sub>RR</sub> =-20dBm, f <sub>RR</sub> =100Hz

● Measurement circuit


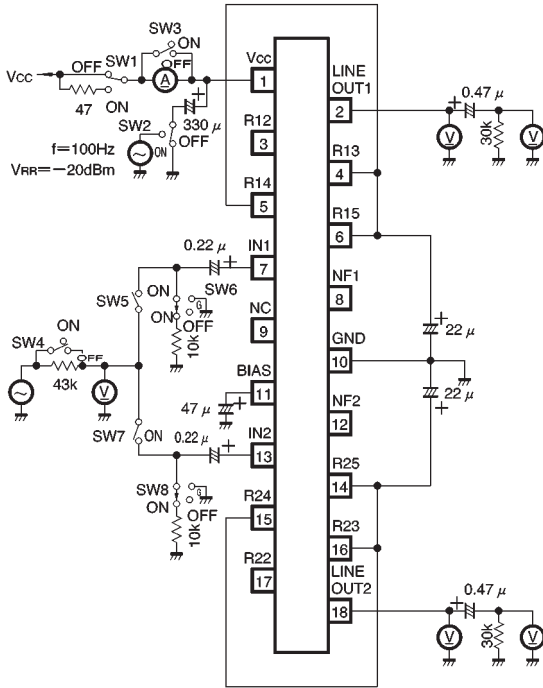


Fig. 1

Measurement circuit switch setting table

SW No. Item	1	2	3	4	5	6	7	8
I <sub>Q</sub>	OFF	OFF	ON	OFF	OFF	ON	OFF	ON
G <sub>VC</sub>	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
V <sub>OM</sub>	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
THD	OFF	OFF	OFF	OFF	ON	OFF	ON	OFF
V <sub>NIN</sub>	OFF	OFF	OFF	OFF	OFF	G	OFF	G
CT	OFF	OFF	OFF	OFF	ON/OFF	OFF/ON	OFF/ON	ON/OFF
R <sub>IN</sub>	OFF	OFF	OFF	ON	ON/OFF	OFF	OFF/ON	OFF
RR	ON	ON	OFF	OFF	OFF	ON	OFF	ON

● Gain setting pattern diagrams

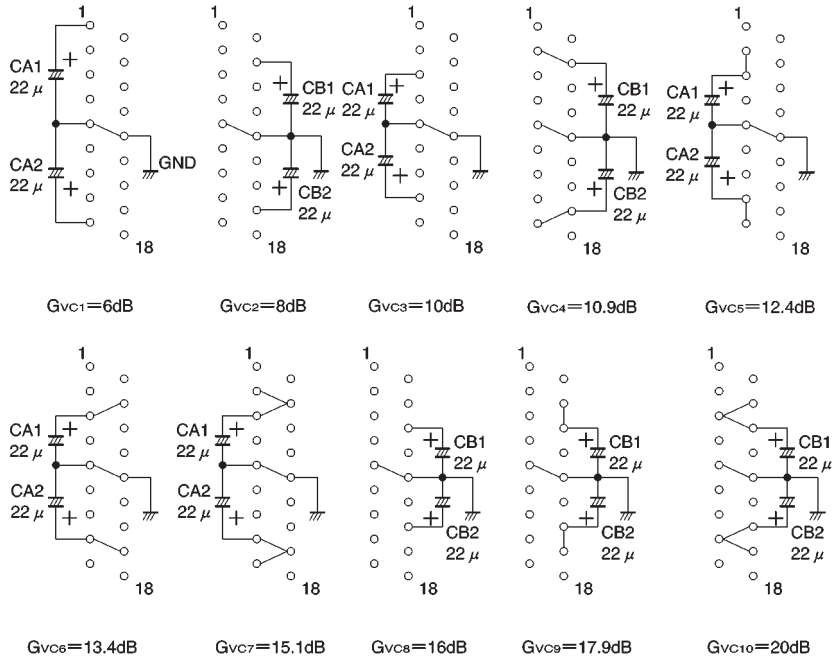

●Application example

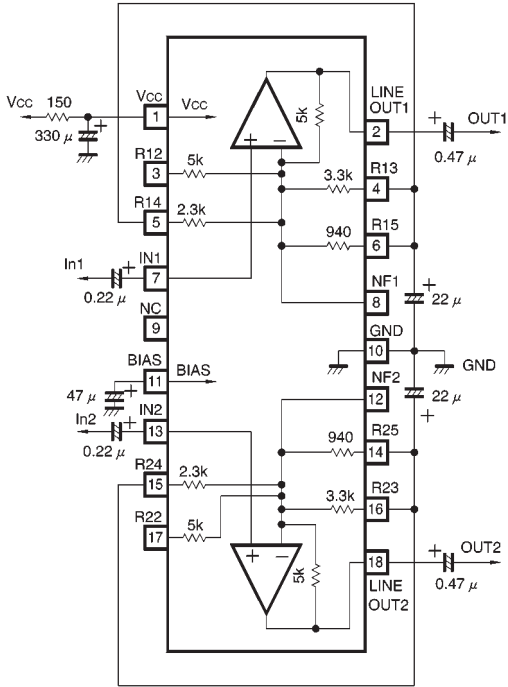


Fig. 2

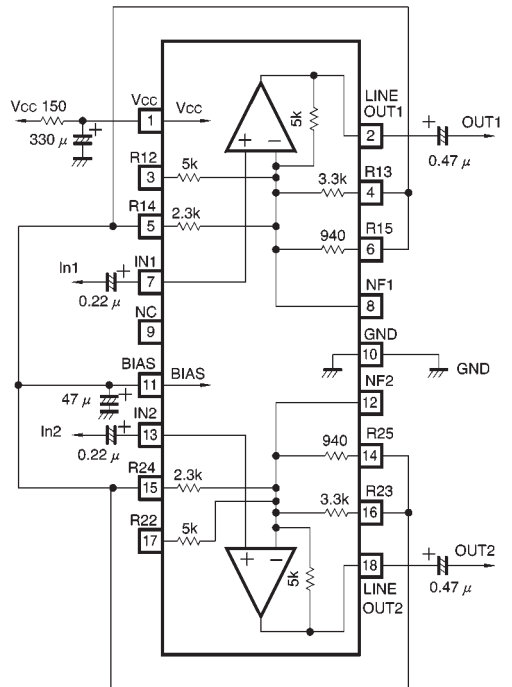


Fig. 3

●Electrical characteristics curves

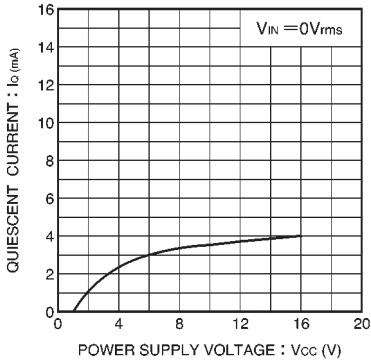


Fig. 4 Quiescent current vs. power supply voltage

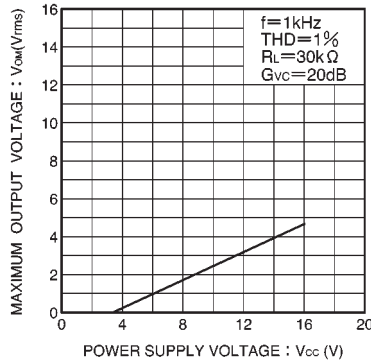


Fig. 5 Maximum output voltage vs. power supply voltage

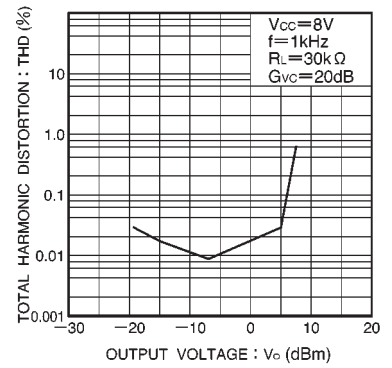


Fig. 6 Total harmonic distortion vs. output voltage


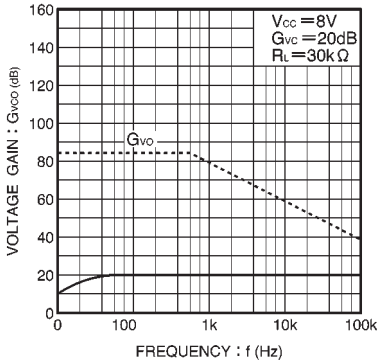


Fig. 7 Voltage gain vs. frequency

●External dimensions (Units: mm)

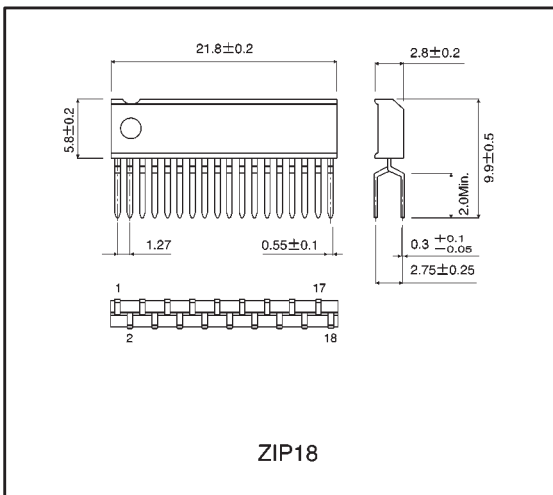

### Notes

- No technical content pages of this document may be reproduced in any form or transmitted by any means without prior permission of ROHM CO.,LTD.
- The contents described herein are subject to change without notice. The specifications for the product described in this document are for reference only. Upon actual use, therefore, please request that specifications to be separately delivered.
- Application circuit diagrams and circuit constants contained herein are shown as examples of standard use and operation. Please pay careful attention to the peripheral conditions when designing circuits and deciding upon circuit constants in the set.
- Any data, including, but not limited to application circuit diagrams information, described herein are intended only as illustrations of such devices and not as the specifications for such devices. ROHM CO.,LTD. disclaims any warranty that any use of such devices shall be free from infringement of any third party's intellectual property rights or other proprietary rights, and further, assumes no liability of whatsoever nature in the event of any such infringement, or arising from or connected with or related to the use of such devices.
- Upon the sale of any such devices, other than for buyer's right to use such devices itself, resell or otherwise dispose of the same, no express or implied right or license to practice or commercially exploit any intellectual property rights or other proprietary rights owned or controlled by
- ROHM CO., LTD. is granted to any such buyer.
- Products listed in this document use silicon as a basic material.  
Products listed in this document are no antiradiation design.

The products listed in this document are designed to be used with ordinary electronic equipment or devices (such as audio visual equipment, office-automation equipment, communications devices, electrical appliances and electronic toys).

Should you intend to use these products with equipment or devices which require an extremely high level of reliability and the malfunction of which would directly endanger human life (such as medical instruments, transportation equipment, aerospace machinery, nuclear-reactor controllers, fuel controllers and other safety devices), please be sure to consult with our sales representative in advance.

#### About Export Control Order in Japan

Products described herein are the objects of controlled goods in Annex 1 (Item 16) of Export Trade Control Order in Japan.

In case of export from Japan, please confirm if it applies to "objective" criteria or an "informed" (by MITI clause) on the basis of "catch all controls for Non-Proliferation of Weapons of Mass Destruction.