

**Surge Arrester** EZ230XCKF

## 3-Electrode-Arrester

Ordering code: B88069X5460B502

## **Preliminary data**

DC spark-over voltage 1) 2) 4)	230 ± 20	V %
Impulse spark-over voltage 4)		
at 100 V/µs - for 99 % of measured values	< 600	V
- typical values of distribution	< 450	V
at 1 kV/µs - for 99 % of measured values	< 750	V
<ul> <li>typical values of distribution</li> </ul>	< 600	V
Impulse life		
150 (+) and 150 (-) operations $10/1000 \mu s^{5)}$	200	Α
Service life		
10 operations $8/20 \mu s^{5}$	5	kA
10 operations 8/20 μs <sup>6)</sup>	5	kA
10 operations 50 Hz, 1 s <sup>5)</sup>	5	Α
10 operations 50 Hz, 1 s <sup>7)</sup>	5	Α
Insulation resistance at 100 V <sub>dc</sub> 4)	> 1	$G\Omega$
Capacitance at 1 MHz <sup>4)</sup>	< 1.5	pF
DC holdover voltage 3)		
at 135 $V_{dc}$ / 1300 $\Omega$	< 150	ms
Transverse delay time 3)	< 0.2	μs
Arc voltage at 1 A	~ 10	V
Glow to arc transition current	~ 1	Α
Glow voltage	~ 80	V
Weight	~ 1	g
Storage temperature	-40 <b>+</b> 90	°C
Climatic category (IEC 60068-1)	40/ 90/ 21	
Marking, blue	<b>EPCOS</b> 230 YY O 230 - Nominal voltage YY - Year of production O - Non radioactive	

At delivery AQL 0.65 level II, DIN ISO 2859

Terms in accordance with ITU-T Rec. K.12 and DIN 57845/VDE0845

Arrester fail safe works at temperatures > 260 °C. The arrester has to be fixed mechanically, if the arrester is contacted by soldering and if the solder temperature is less than 260 °C.

AB E / AB PM Issue 04, 27.01.2003

In ionized mode

Test according to ITU-T Rec. K.12

Tip or ring electrode to center electrode

Total current through center electrode, half value through tip respectively ring electrode.

<sup>5</sup> operations ring to center electrode & 5 operations tip to center electrode

Total current through center electrode, same value through tip respectively ring electrode.




Surge Arrester EZ230XCKF

Ordering code: B88069X5460B502

## 3-Electrode-Arrester

**Preliminary data** 

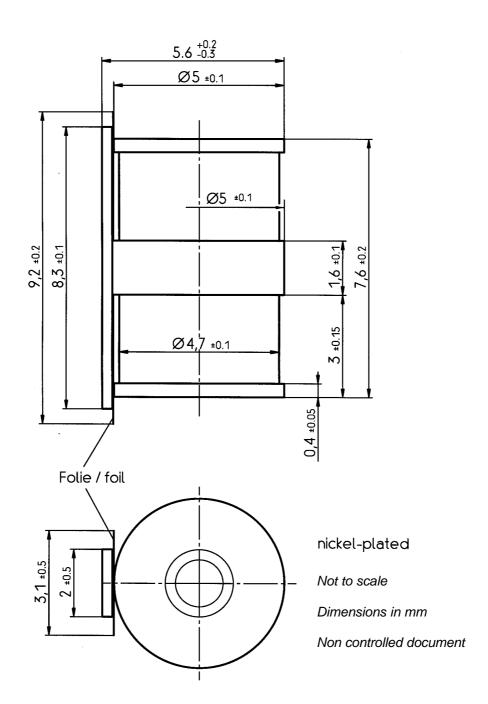

AB E / AB PM Issue 04, 27.01.2003

<sup>©</sup> EPCOS AG 2002. Reproduction, publication and dissemination of this data sheet, enclosures hereto and the information contained therein without EPCOS' prior express consent is prohibited.

Purchase orders are subject to the General Conditions for the Supply of Products and Services of the Electrical and Electronics Industry recommended by the ZVEI (German Electrical and Electronic Manufacturers' Association), unless otherwise agreed.