


# MB2S THRU MB6S

## MINIATURE GLASS PASSIVATED SINGLE-PHASE SURFACE MOUNT BRIDGE RECTIFIER

*Reverse Voltage - 200 to 600 Volts    Forward Current - 0.5 Ampere*

### TO-269AA

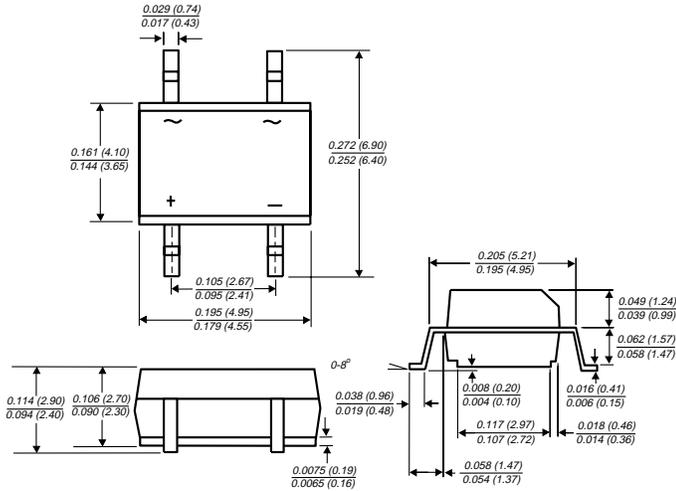

Dimensions in inches and (millimeters)

### FEATURES

- ◆ Plastic package has Underwriters Laboratory Flammability Classification 94V-0
- ◆ This series is UL recognized under Component Index, file number E54214
- ◆ Glass passivated chip junctions
- ◆ High surge overload rating: 35A peak
- ◆ Saves space on printed circuit boards
- ◆ High temperature soldering guaranteed: 260°C/10 seconds at 5 lbs. (2.3kg) tension



### MECHANICAL DATA

- Case:** Molded plastic body over passivated junctions
- Terminals:** Plated leads solderable per MIL-STD-750, Method 2026
- Polarity:** Polarity symbols marked on body
- Mounting Position:** Any
- Weight:** 0.0078 ounce, 0.22 gram

### MAXIMUM RATINGS AND ELECTRICAL CHARACTERISTICS

Ratings at 25°C ambient temperature unless otherwise specified.


|  | SYMBOLS  | MB2S | MB4S                 | MB6S | UNITS              |
|--|--|------|----------------------|------|--------------------|
| Device marking code  |  | 2    | 4                    | 6    |                    |
| Maximum repetitive peak reverse voltage  | V <sub>RRM</sub>   | 200  | 400                  | 600  | Volts              |
| Maximum RMS voltage  | V <sub>RMS</sub>   | 140  | 280                  | 420  | Volts              |
| Maximum DC blocking voltage  | V <sub>DC</sub>  | 200  | 400                  | 600  | Volts              |
| Maximum average forward output rectified current at T <sub>A</sub> =30°C<br>- on glass-epoxy P.C.B. (NOTE 1)<br>- on aluminum substrate (NOTE 2) | I <sub>(AV)</sub>  |      | 0.5<br>0.8           |      | Amp                |
| Peak forward surge current 8.3msec single half sine-wave superimposed on rated load (JEDEC Method)   | I <sub>FSM</sub>   |      | 35.0                 |      | Amps               |
| Rating for fusing (t<8.3ms)  | I <sup>2</sup> t   |      | 5.0                  |      | A <sup>2</sup> sec |
| Maximum instantaneous forward voltage drop per leg at 0.4A   | V <sub>F</sub>   |      | 1.0                  |      | Volts              |
| Maximum DC reverse current at rated DC blocking voltage per leg<br>T <sub>A</sub> =25°C<br>T <sub>A</sub> =125°C                                 | I <sub>R</sub>   |      | 5.0<br>100           |      | µA                 |
| Typical junction capacitance per leg (NOTE 3)  | C <sub>J</sub>   |      | 13.0                 |      | pF                 |
| Typical thermal resistance per leg<br>(NOTE 1)<br>(NOTE 2)<br>(NOTE 1)   | R <sub>θJA</sub><br>R <sub>θJA</sub><br>R <sub>θJL</sub> |      | 85.0<br>70.0<br>20.0 |      | °C/W               |
| Operating junction and storage temperature range   | T <sub>J</sub> , T <sub>STG</sub>                        |      | -55 to +150          |      | °C                 |

**NOTES:**


- (1) On glass epoxy P.C.B. mounted on 0.05 x 0.05" (1.3 x 1.3mm) pads
- (2) On aluminum substrate P.C.B. with an area of 0.8" x 0.8" (20 x 20mm) mounted on 0.05 x 0.05" (1.3 x 1.3mm) solder pad
- (3) Measured at 1.0 MHz and applied reverse voltage of 4.0 Volts

# RATINGS AND CHARACTERISTIC CURVES MB2S THRU MB6S


**FIG. 1 - DERATING CURVE FOR OUTPUT RECTIFIED CURRENT**

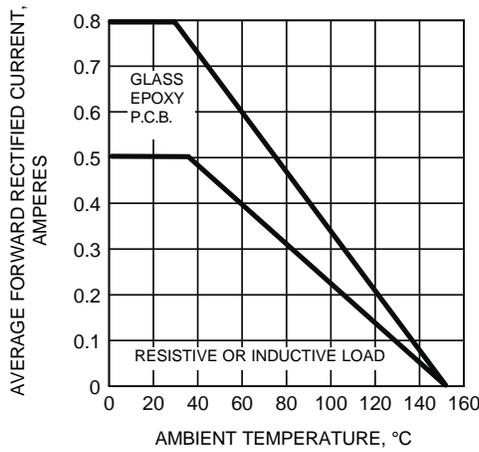


**FIG. 2 - MAXIMUM NON-REPETITIVE PEAK FORWARD SURGE CURRENT PER LEG**

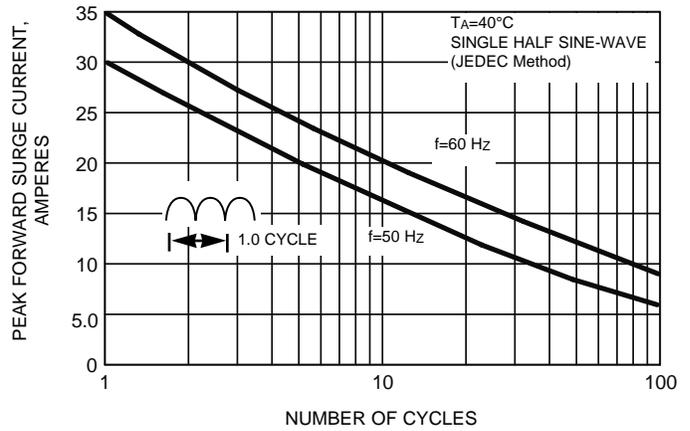

**FIG. 3 - TYPICAL FORWARD VOLTAGE CHARACTERISTICS PER LEG**

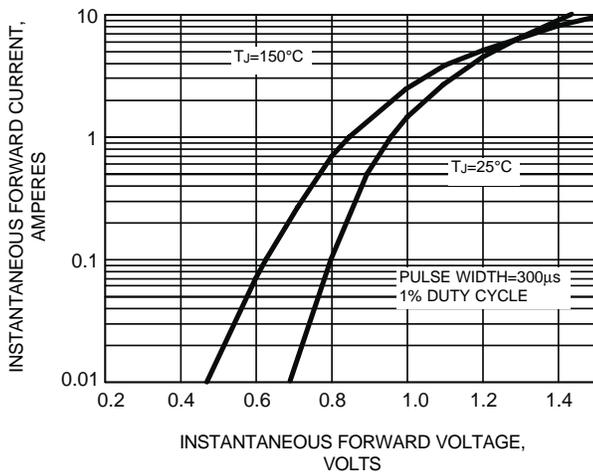

**FIG. 4 - TYPICAL REVERSE LEAKAGE CHARACTERISTICS PER LEG**

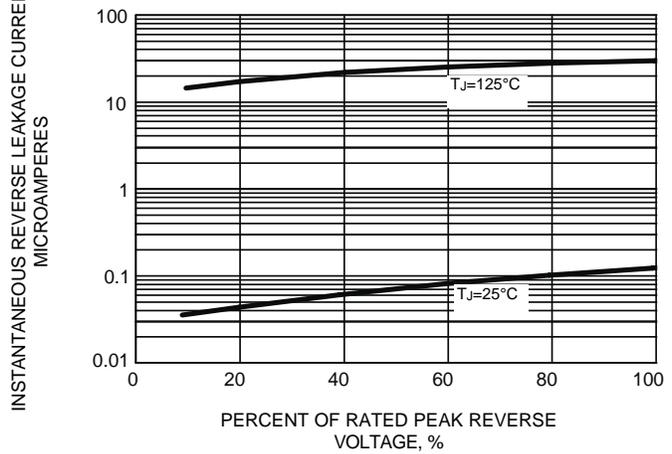

**FIG. 5 - TYPICAL JUNCTION CAPACITANCE PER LEG**

