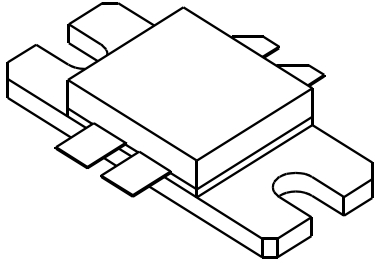


UTV8100B

100 Watts Pk, 28 Volt, Class AB
UHF Television - Band IV & V

<p>GENERAL DESCRIPTION The UTV8100B is a COMMON EMITTER transistor capable of providing 100 Watt Peak, Class AB, RF Output Power over the band 470 - 860 MHz. The transistor includes double input and output prematching for full broadband capability. Gold Metalization and Diffused Ballasting are used to provide high reliability and supreme ruggedness.</p>	<p>CASE OUTLINE 55RT, STYLE 2</p> 
<p>ABSOLUTE MAXIMUM RATINGS</p> <p>Maximum Power Dissipation @ 25°C 290 Watts</p> <p>Maximum Voltage and Current</p> <p>BV_{ce0} Collector to Emitter Voltage 65 Volts BV_{ce0} Collector to Emitter Voltage 30 Volts BV_{eb0} Emitter to Base Voltage 3.5 Volts I_c Collector Current 15 Amps</p> <p>Maximum Temperatures</p> <p>Storage Temperature -40 to + 150°C Operating Junction Temperature + 200 °C</p>	

ELECTRICAL CHARACTERISTICS @ 25 °C

SYMBOL	CHARACTERISTICS	TEST CONDITIONS	MIN	TYP	MAX	UNITS
P_{ldB}	Power Out - 1 dB Compression	F = 470 - 860 MHz	100	110		Watts
P_{in}	Power Input	V _{cc} = 28 Volts			14.0	Watts
P_{o - ref}	Power Output - Linear	I _{cq} = 300 mA (total)	25			Watts
P_g	Power Gain - Small Sig		8.5	9.5		dB
η	Efficiency		55	58		%
VSWR	Load Mismatch Tolerance	P _{out} = 25 Watts Pk	5:1			

* European Test Method, Vision = -8 dB, Sideband = - 16 dB, Sound = - 7 dB


BV_{ceo}	Collector to Emitter Breakdown	I _c = 25 mA	30			Volts
BV_{ces}	Collector to Emitter Breakdown	I _c = 25 mA	60			Volts
BV_{ebo}	Emitter to Base Breakdown	I _e = 30 mA	3.5			Volts
H_{fe}	Current Gain	V _{ce} = 5 V, I _c = 1 A	20		120	
C_{ob}	Output Capacitance - (each side)*	V _{cb} = 28V, F=1MHz		44		pF
R_{θjc}	Thermal Resistance	T _c = 25 °C			0.6	°C/W

* Not measurable due to internal prematch network

Issue December 1996


GHZ TECHNOLOGY, INC. RESERVES THE RIGHT TO MAKE CHANGES WITHOUT FURTHER NOTICE. GHZ RECOMMENDS THAT BEFORE THE PRODUCT(S) DESCRIBED HEREIN ARE WRITTEN INTO SPECIFICATIONS, OR USED IN CRITICAL APPLICATIONS, THAT THE PERFORMANCE CHARACTERISTICS BE VERIFIED BY CONTACTING THE FACTORY.

DC SAFE OPERATING AREA

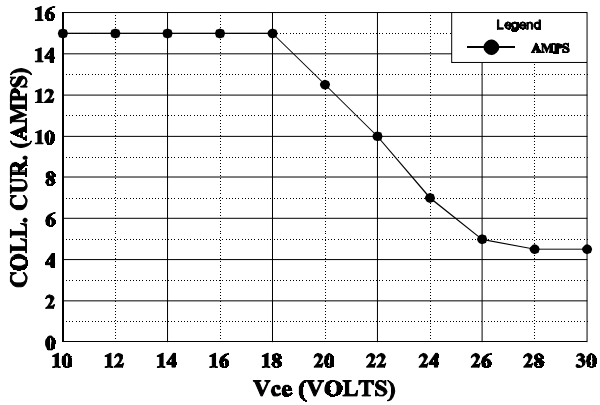


POWER OUTPUT vs POWER INPUT

Vcc = 28 V, Frequency 860MHz

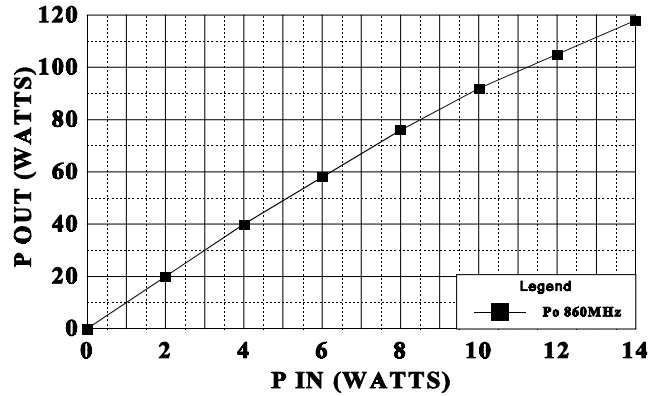


INPUT IMPEDANCE vs FREQUENCY

Vcc = 28 V, Po = 100 W, Icq = 200 mA

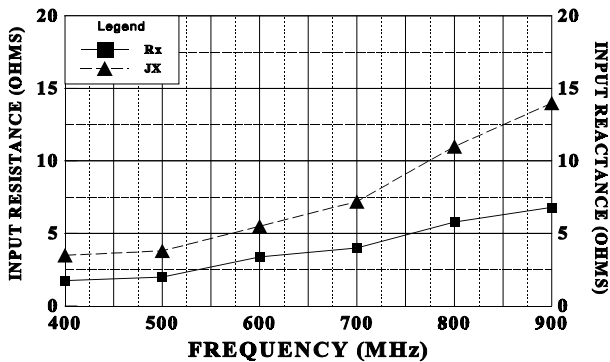


LOAD IMPEDANCE vs FREQUENCY

Vcc = 28 V, Pout = 100W, Icq = 200 mA

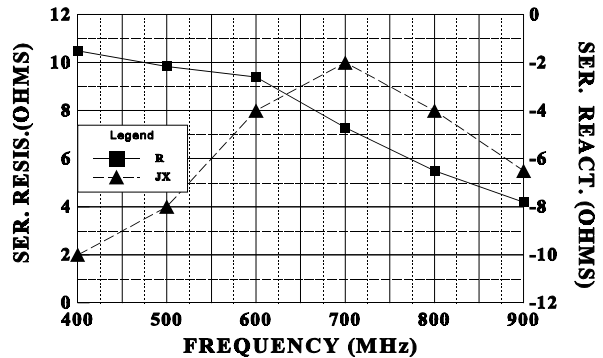

REVISIONS

ZONE	REV	DESCRIPTION	DATE	APPROVED
------	-----	-------------	------	----------

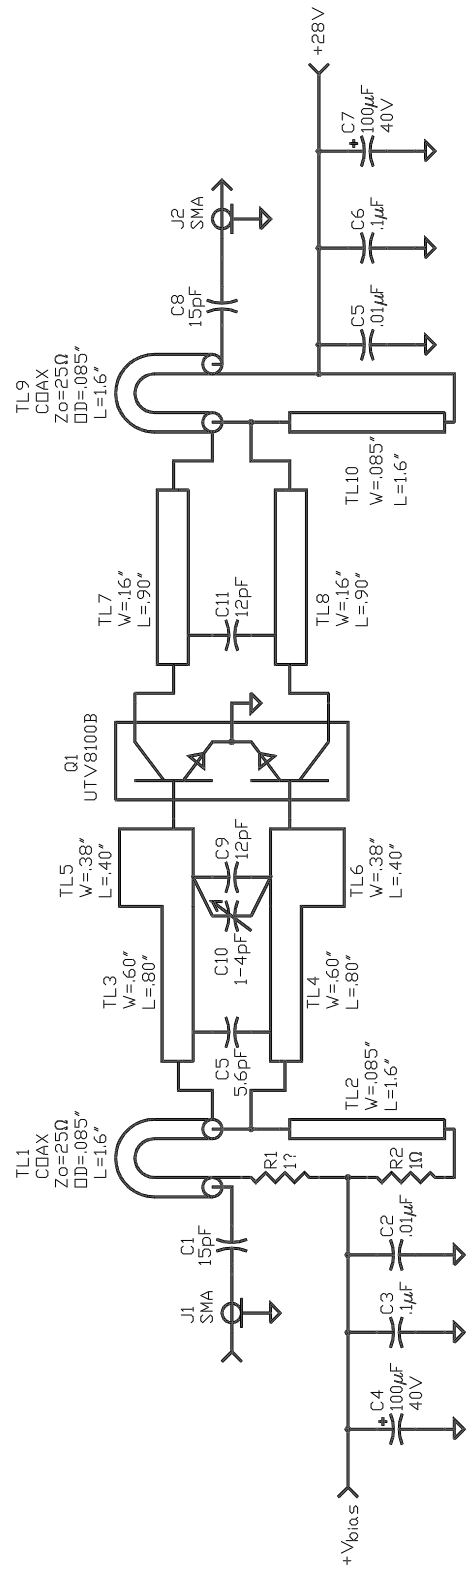

Board type: PTFE/GLASS
 Board thickness: .031"
 Copper weight: 1oz
 All dimensions are in inches.



CAGE 0PJR2	DWG NO. UTV8100B	REV A
SCALE		SHEET