


SWITCHING APPLICATION.
INTERFACE CIRCUIT AND DRIVER CIRCUIT APPLICATION.

FEATURES


- With Built-in Bias Resistors.
- Simplify Circuit Design.
- Reduce a Quantity of Parts and Manufacturing Process.
- High Packing Density.

EQUIVALENT CIRCUIT




BIAS RESISTOR VALUES

TYPE NO.	R1(kΩ)	R2(kΩ)
KRC821E	4.7	4.7
KRC822E	10	10
KRC823E	22	22
KRC824E	47	47
KRC825E	2.2	47
KRC826E	4.7	47

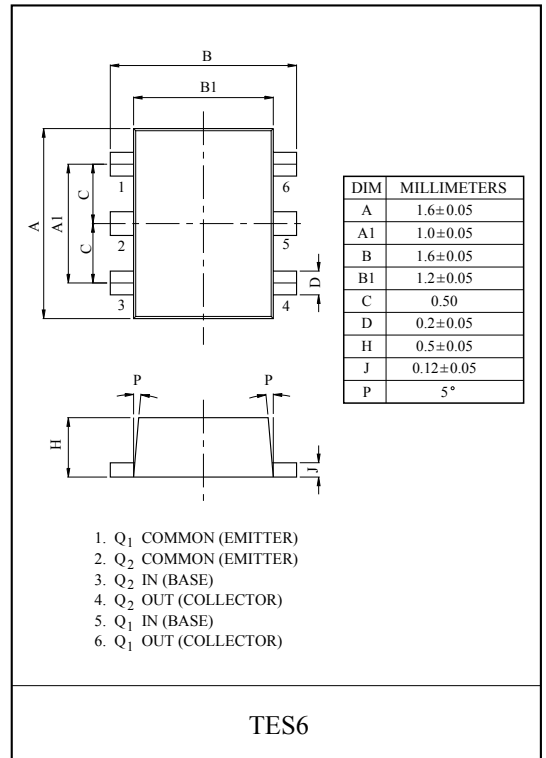

EQUIVALENT CIRCUIT (TOP VIEW)



MAXIMUM RATING (Ta=25°C)


CHARACTERISTIC		SYMBOL	RATING	UNIT
Output Voltage	KRC821E ~ 826E	V_O	50	V
Input Voltage	KRC821E	V_I	20, -10	V
	KRC822E		30, -10	
	KRC823E		40, -10	
	KRC824E		40, -10	
	KRC825E		12, -5	
	KRC826E		20, -5	
Output Current	KRC821E ~ 826E	I_O	100	mA
Power Dissipation		P_D^*	200	mW
Junction Temperature		T_j	150	°C
Storage Temperature Range		T_{stg}	-55 ~ 150	°C

* Total Rating.

MARK SPEC

TYPE	KRC821E	KRC822E	KRC823E	KRC824E	KRC825E	KRC826E
MARK	YA	YB	YC	YD	YE	YF

Marking



KRC821E~KRC826E

ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Output Cut-off Current	KRC821E ~ 826E	$I_{O(OFF)}$	$V_O=50V, V_I=0$	-	-	500	nA
DC Current Gain	KRC821E	G_I	$V_O=5V, I_O=10mA$	30	55	-	
	KRC822E			50	80	-	
	KRC823E			70	120	-	
	KRC824E			80	200	-	
	KRC825E			80	200	-	
	KRC826E			80	200	-	
Output Voltage	KRC821E ~ 826E	$V_{O(ON)}$	$I_O=10mA, I_I=0.5mA$	-	0.1	0.3	V
Input Voltage (ON)	KRC821E	$V_{I(ON)}$	$V_O=0.2V, I_O=5mA$	-	1.5	2.0	V
	KRC822E			-	1.8	2.4	
	KRC823E			-	2.1	3.0	
	KRC824E			-	2.8	5.0	
	KRC825E			-	0.8	1.1	
	KRC826E			-	0.9	1.3	
Input Voltage (OFF)	KRC821E ~ 824E	$V_{I(OFF)}$	$V_O=5V, I_O=0.1mA$	1.0	1.2	-	V
	KRC825E ~ 826E			0.5	0.65	-	
Transition Frequency	KRC821E ~ 826E	f_T^*	$V_O=10V, I_O=5mA$	-	200	-	MHz
Input Current	KRC821E	I_I	$V_I=5V$	-	-	1.8	mA
	KRC822E			-	-	0.88	
	KRC823E			-	-	0.36	
	KRC824E			-	-	0.18	
	KRC825E			-	-	3.6	
	KRC826E			-	-	1.8	







Note : * Characteristic of Transistor Only.

KRC821E~KRC826E







ELECTRICAL CHARACTERISTICS (Ta=25°C)

CHARACTERISTIC		SYMBOL	TEST CONDITION	MIN.	TYP.	MAX.	UNIT
Switching Time	Rise Time	KRC821E	V _O =5V V _{IN} =5V R _L =1kΩ	-	0.03	-	μS
		KRC822E		-	0.05	-	
		KRC823E		-	0.12	-	
		KRC824E		-	0.22	-	
		KRC825E		-	0.01	-	
		KRC826E		-	0.03	-	
	Storage Time	KRC821E		-	2.0	-	
		KRC822E		-	2.0	-	
		KRC823E		-	2.0	-	
		KRC824E		-	2.0	-	
		KRC825E		-	2.0	-	
		KRC826E		-	2.0	-	
	Fall Time	KRC821E		-	0.12	-	
		KRC822E		-	0.36	-	
		KRC823E		-	0.35	-	
		KRC824E		-	0.6	-	
		KRC825E		-	0.1	-	
		KRC826E		-	0.19	-	

KRC821E~KRC826E

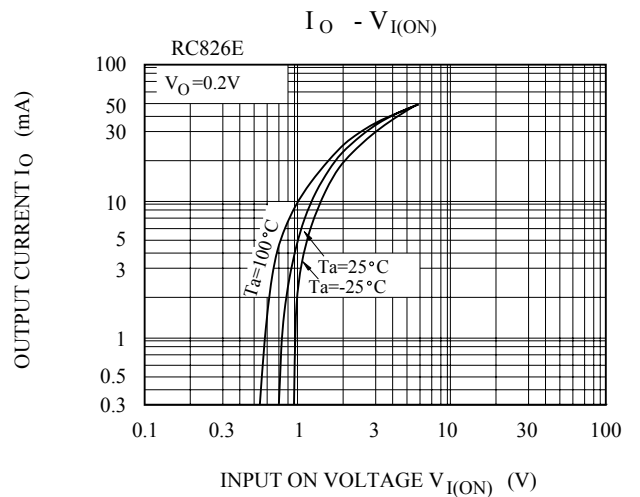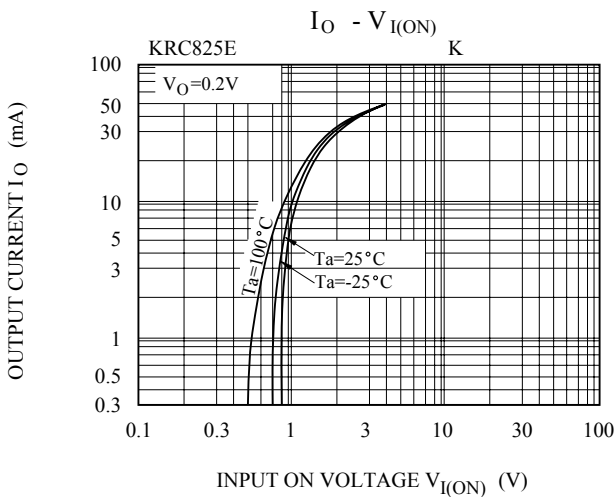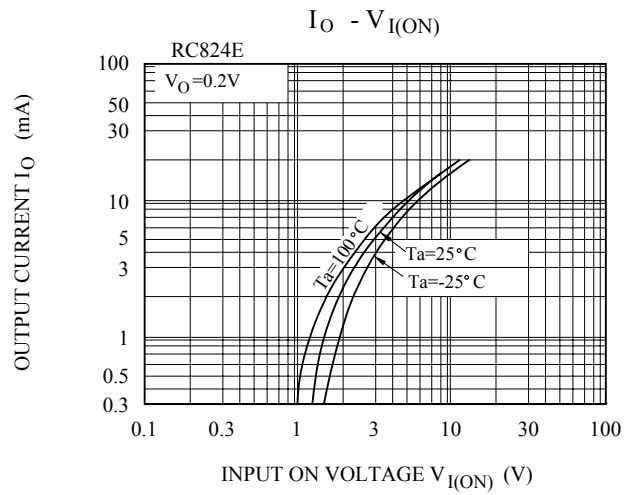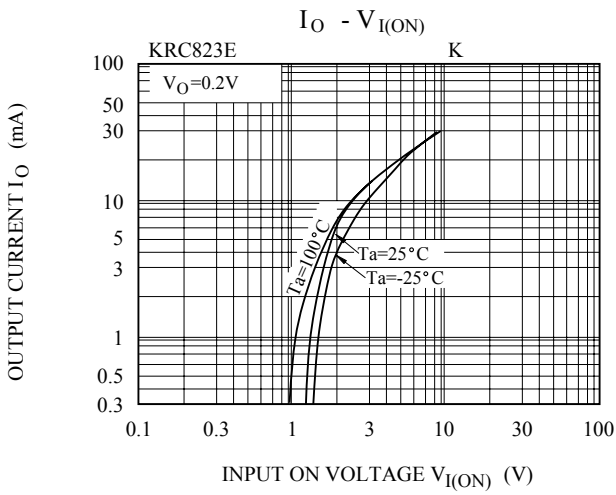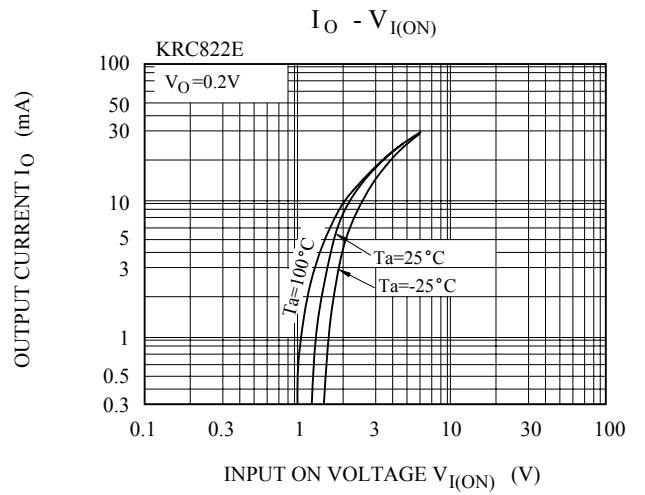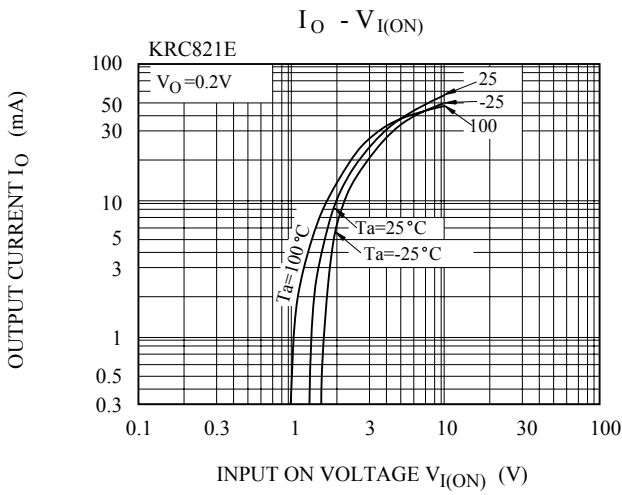

KRC821E~KRC826E

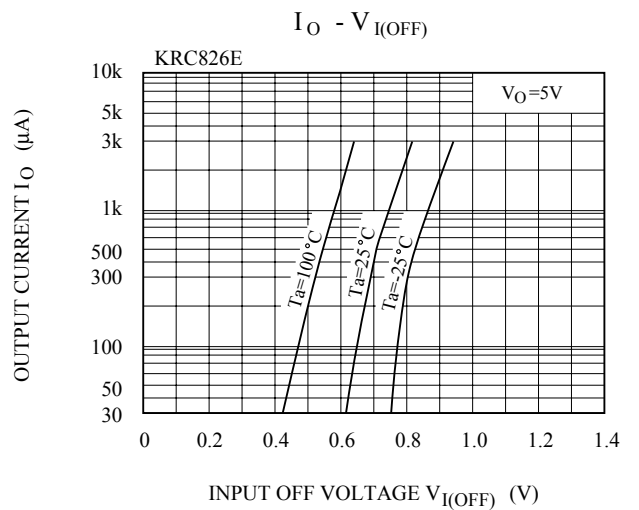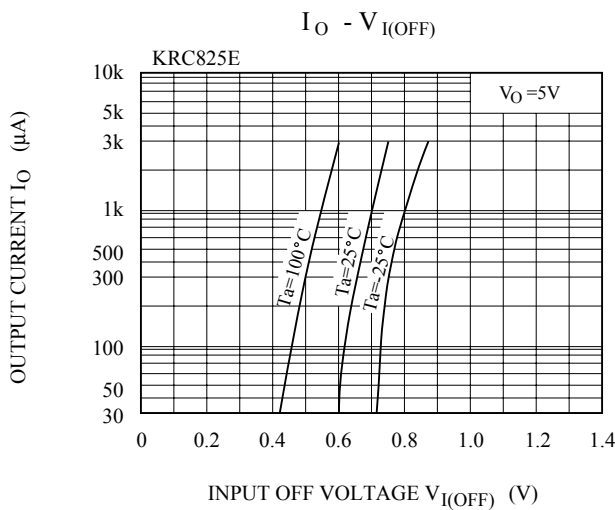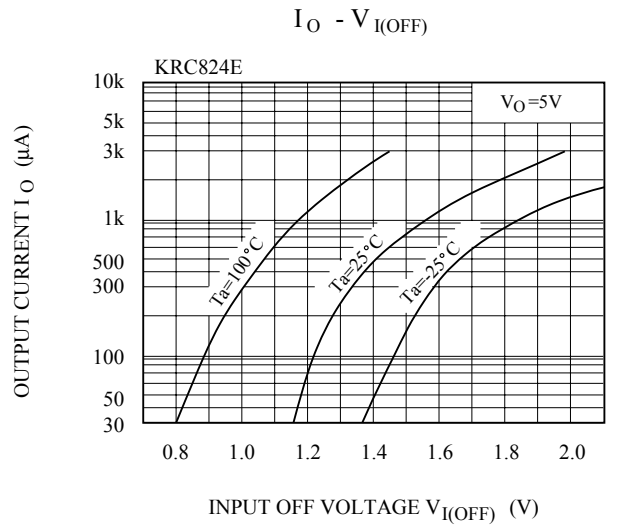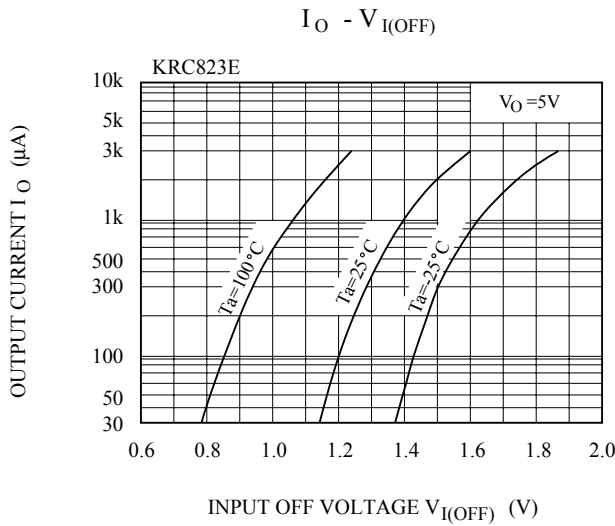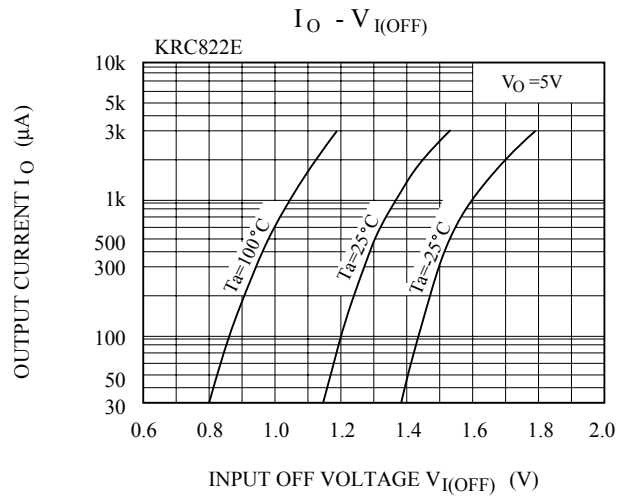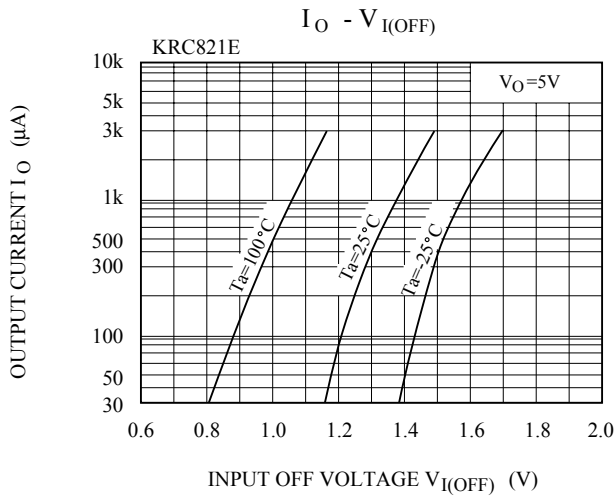

KRC821E~KRC826E

