

# E-Series Surface Mount Mixer

## 5 - 1500 MHz

# EMRS-5LH

V3.00

### Features

- LO Power: +10 dBm
- Up to +5 dBm RF
- Surface Mount

### Specifications @ 25 °C

Frequency Range		
RF		5 - 1500 MHz
LO		5 - 1500 MHz
IF		DC - 1000 MHz
Conversion Loss (dB)		
	Typical	Maximum
10 - 750 MHz	6.5	7.5
5 - 1500 MHz	7.5	9.5
Isolation (dB)		
	Typical	Minimum
LO to RF		
5 - 50 MHz	60	40
50 - 750 MHz	40	20
750 - 1500 MHz	30	18
LO to IF		
5 - 50 MHz	55	30
50 - 750 MHz	30	18
750 - 1500 MHz	15	8

### Operating Characteristics

Impedance	50 Ohms Nominal
RF input for 1dB Compression	+5 dBm


### Ordering Information

<b>Part No.</b>	<b>Packaging</b>
EMRS-5LH	Tubes
EMRS-5LHTR	Forward Tape & Reel

### Absolute Maximum Ratings

Parameter	Absolute Maximum
RF Power	50 mW
Peak IF Current	40 mA
Storage Temperature	-55°C to 100°C
Operating Temperature	-55°C to 100°C
Pin Temperature (10 Seconds)	260°C

### SM-1

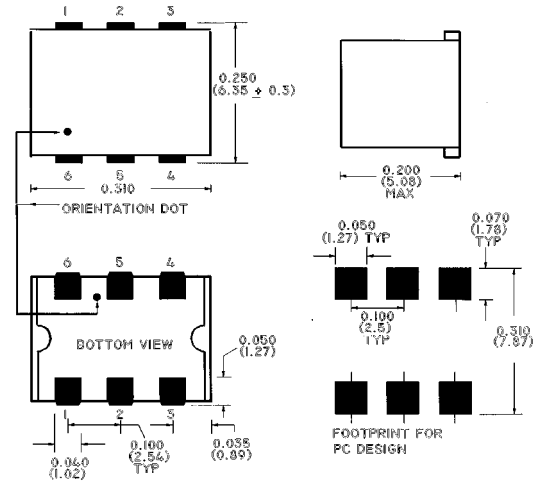

Dimensions in ( ) are in mm.  
 Unless Otherwise Noted: .x = ±0.04 (1.00)  
 .xx = ±0.02 (0.50)  
 .xxx = ±0.010 (0.250)

### Pin Configuration

Function	Pin No.
LO	1
RF	4
IF	5
Ground	2,3,6

Specifications Subject to Change Without Notice.

S 0077 C

**M/A-COM, Inc.**

**1**

North America: Tel. (800) 366-2266 ■ Asia/Pacific: Tel. +81 (03) 3226-1671 ■ Europe: Tel. +44 (1344) 869 595  
 Fax (800) 618-8883 Fax +81 (03) 3226-1451 Fax +44 (1344) 300 020