

**8-BIT PIPO SHIFT REGISTER WITH ASYNCHRONOUS CLEAR**

The TC74ACT299 is an advanced high speed CMOS 8-BIT PIPO SHIFT REGISTER fabricated with silicon gate and double-layer metal wiring C<sup>2</sup>MOS technology.

It achieves the high speed operation similar to equivalent Bipolar Schottky TTL while maintaining the CMOS low power dissipation.

This device may be used as a level converter for interfacing TTL or NMOS to High Speed CMOS. The inputs are compatible with TTL, NMOS and CMOS output voltage levels.



It has a four modes (HOLD, SHIFT LEFT, SHIFT RIGHT and LOAD DATA) controlled by the two selection inputs (S0, S1).

When one or both enable (G1, G2) are high, the eight I/O outputs are forced to the high-impedance state; however, sequential operation or clearing of the register is not affected. All inputs are equipped with protection circuits against static discharge or transient excess voltage.


**FEATURES:**

- High Speed..... $f_{MAX} = 130\text{MHz}$  (typ.)  
at  $V_{CC} = 5\text{V}$
- Low Power Dissipation..... $I_{CC} = 8\mu\text{A}$ (Max.) at  $T_a = 25^\circ\text{C}$
- Compatible with TTL outputs ..... $V_{IL} = 0.8\text{V}$ (Max.)  
 $V_{IH} = 2.0\text{V}$ (Min.)
- Symmetrical Output Impedance..... $|I_{OH}| = I_{OL} = 24\text{mA}$  (Min.)  
Capability of driving 50Ω transmission lines.
- Balanced Propagation Delays..... $t_{pLH} \approx t_{pHL}$
- Pin and Function Compatible with 74F299

**IEC LOGIC SYMBOL**

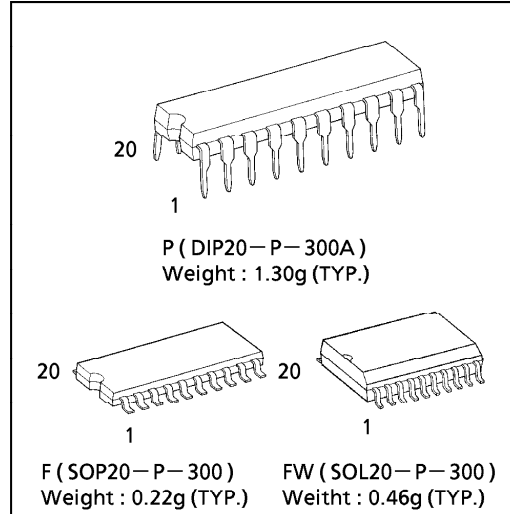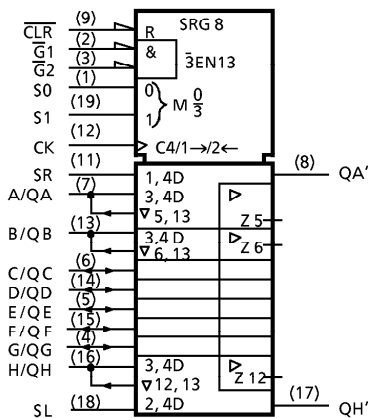

**PIN ASSIGNMENT**

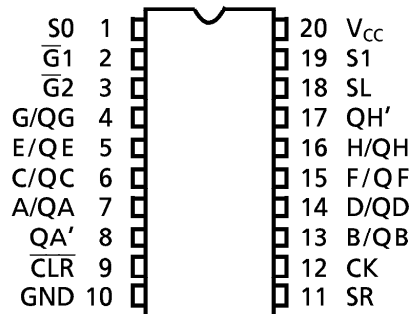

(TOP VIEW)

**APPLICATION NOTES**

- 1) Do not apply a signal to any bus terminal when it is in the output mode. Damage may result.
- 2) All floating (high impedance) bus terminals must have their input levels fixed by means of pull up or pull down resistors.

© The information contained herein is presented only as a guide for the applications of our products. No responsibility is assumed by TOSHIBA CORPORATION for any infringements of intellectual property or other rights of the third parties which may result from its use. No license is granted by implication or otherwise under any intellectual property or other rights of TOSHIBA CORPORATION or others.

© These TOSHIBA products are intended for use in general commercial applications (office equipment, communication equipment, measuring equipment, domestic appliances, etc.). please make sure that you consult with us before you use these TOSHIBA products in equipment which requires extraordinarily high quality and/or reliability, and in equipment which may involve life threatening or critical application, including but not limited to such uses as atomic energy control, airplane or spaceship instrumentation, traffic signals, medical instrumentation, combustion control, all types of safety devices, etc. TOSHIBA cannot accept and hereby disclaims liability for any damage which may occur in case the TOSHIBA products are used in such equipment or applications without prior consultation with TOSHIBA.




**TRUTH TABLE**

MODE	INPUTS								INPUTS/ OUTPUTS		OUTPUTS	
	$\overline{\text{CLR}}$	FUNCTION SELECT		OUTPUT CONTROL		CK	SERIAL		A/QA	H/QH	QA'	QH'
		S1	S0	$\overline{\text{G1}}^*$	$\overline{\text{G2}}^*$		SL	SR				
Z	L	H	H	X	X	X	X	X	Z	Z	L	L
CLEAR	L	L	X	L	L	X	X	X	L	L	L	L
	L	X	L	L	L	X	X	X	L	L	L	L
HOLD	H	L	L	L	L	X	X	X	QA0	QH0	QA0	QH0
SHIFT RIGHT	H	L	H	L	L	$\downarrow$	X	H	H	QGn	H	QGn
SHIFT LEFT	H	L	H	L	L	$\uparrow$	X	L	L	QGn	L	QGn
SHIFT LEFT	H	H	L	L	L	$\downarrow$	H	X	QBn	H	QBn	H
SHIFT LEFT	H	H	L	L	L	$\uparrow$	L	X	QBn	L	QBn	L
LOAD	H	H	H	X	X	$\uparrow$	X	X	a	h	a	h


\* When one or both output controls are high, the eight input/output terminals are in the high-impedance state; however sequential or clearing of the register is not affected.

- Z : High Impedance
- Qn0 : The level of Qn before the indicated steady - state input conditions were established.
- Qnn : The level of Qn before the most recent active transition indicated by  $\downarrow$  or  $\uparrow$ .
- a, h : The level of the steady - state inputs A, H, respectively.
- X : Don't Care.

**TIMING CHART**

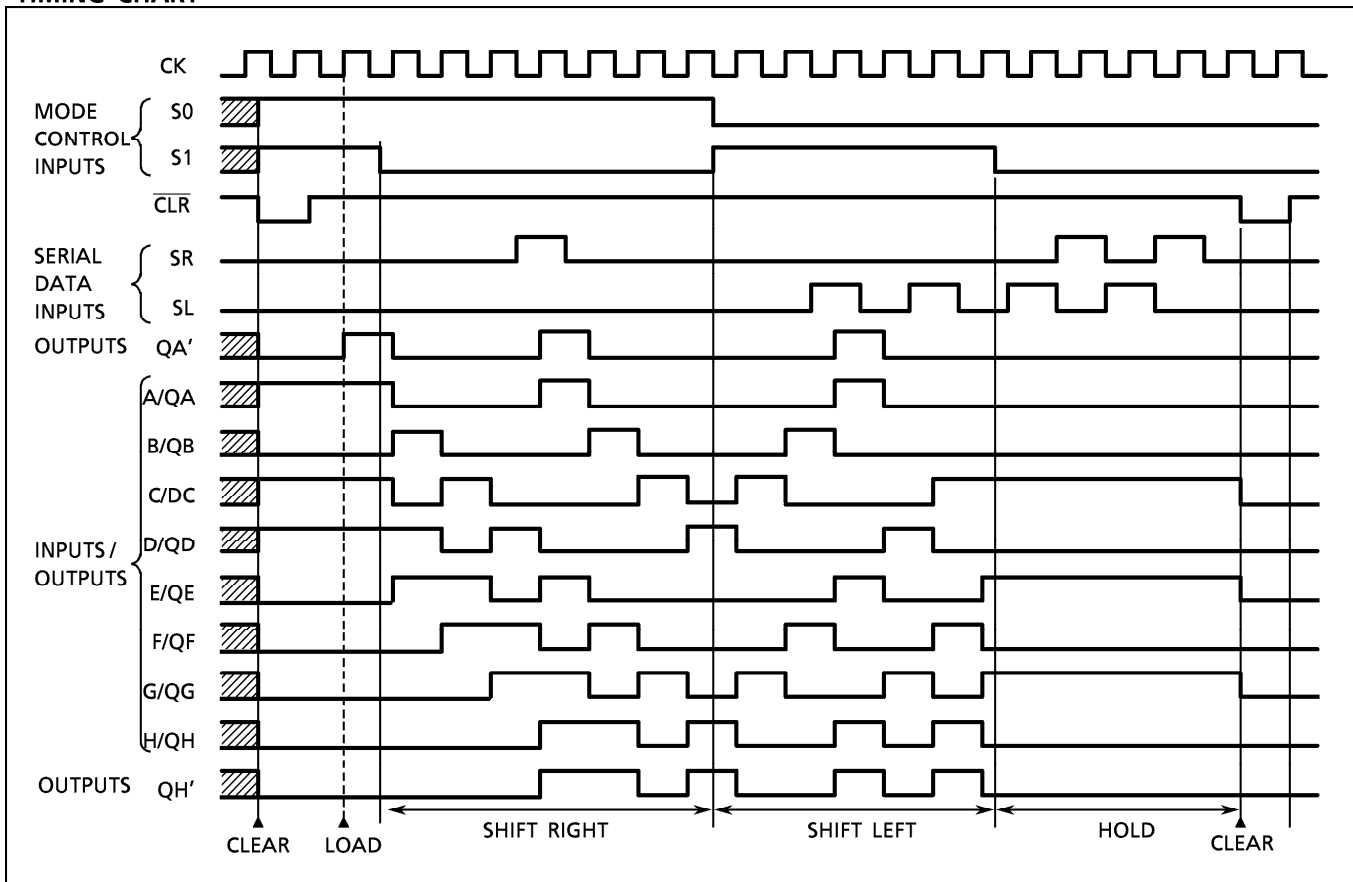

**SYSTEM DIAGRAM**

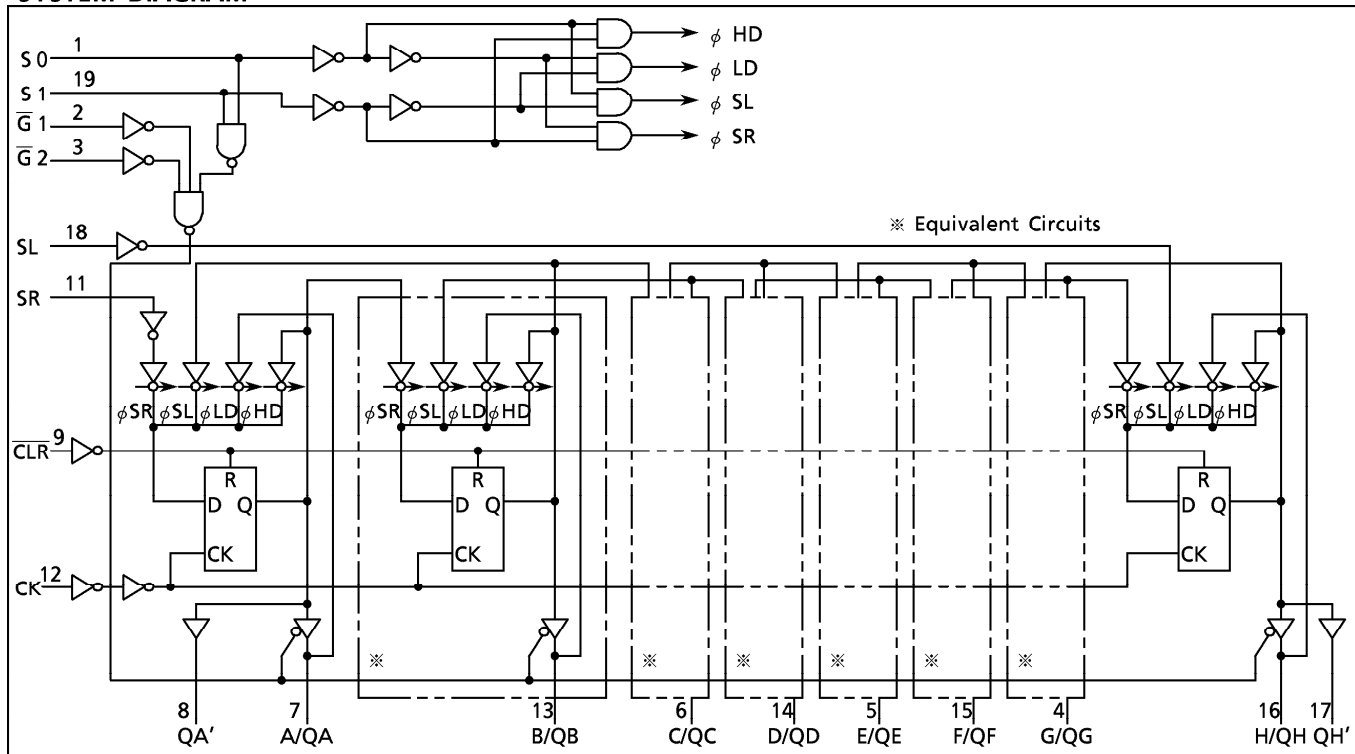

**ABSOLUTE MAXIMUM RATINGS**

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage Range	$V_{CC}$	-0.5~7.0	V
DC Input Voltage	$V_{IN}$	-0.5~ $V_{CC} + 0.5$	V
DC Output Voltage	$V_{OUT}$	-0.5~ $V_{CC} + 0.5$	V
Input Diode Current	$I_{IK}$	$\pm 20$	mA
Output Diode Current	$I_{OK}$	$\pm 50$	mA
DC Output Current	$I_{OUT}$	$\pm 50$	mA
DC $V_{CC}$ /Ground Current	$I_{CC}$	$\pm 250$	mA
Power Dissipation	$P_D$	500 (DIP)* / 180 (SOP)	mW
Storage Temperature	$T_{stg}$	-65~150	$^{\circ}C$

\*500mW in the range of  $T_a = -40^{\circ}C \sim 65^{\circ}C$ . From  $T_a = 65^{\circ}C$  to  $85^{\circ}C$  a derating factor of  $-10mW/^{\circ}C$  should be applied up to 300mW.

**RECOMMENDED OPERATING CONDITIONS**

PARAMETER	SYMBOL	VALUE	UNIT
Supply Voltage	$V_{CC}$	4.5~5.5	V
Input Voltage	$V_{IN}$	0~ $V_{CC}$	V
Output Voltage	$V_{OUT}$	0~ $V_{CC}$	V
Operating Temperature	$T_{opr}$	-40~85	$^{\circ}C$
Input Rise and Fall Time	$dt/dV$	0~10	ns/V

**DC ELECTRICAL CHARACTERISTICS**

PARAMETER	SYMBOL	TEST CONDITION	V <sub>CC</sub> (V)	Ta = 25°C			Ta = -40~85°C		UNIT
				MIN.	TYP.	MAX.	MIN.	MAX.	
High - Level Input Voltage	V <sub>IH</sub>		4.5 5.5	2.0	—	—	2.0	—	V
Low - Level Input Voltage	V <sub>IL</sub>		4.5 5.5	—	—	0.8	—	0.8	V
High - Level Output Voltage	V <sub>OH</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	4.5 4.5 5.5	4.4 3.94 —	4.5 — —	— — —	4.4 3.80 3.85	— — —	V
Low - Level Output Voltage	V <sub>OL</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub>	4.5 4.5 5.5	— — —	0.0 — —	0.1 0.36 —	— — —	0.1 0.44 1.65	V
3 - State Output Off - State Current	I <sub>OZ</sub>	V <sub>IN</sub> = V <sub>IH</sub> or V <sub>IL</sub> V <sub>OUT</sub> = V <sub>CC</sub> or GND	5.5	—	—	± 0.5	—	± 5.0	μA
Input Leakage Current	I <sub>IN</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND	5.5	—	—	± 0.1	—	± 1.0	
Quiescent Supply Current	I <sub>CC</sub>	V <sub>IN</sub> = V <sub>CC</sub> or GND	5.5	—	—	8.0	—	80.0	
	I <sub>C</sub>	PER INPUT: V <sub>IN</sub> = 3.4V OTHER INPUT: V <sub>CC</sub> or GND	5.5	—	—	1.35	—	1.5	mA

\* : This spec indicates the capability of driving 50Ω transmission lines.  
One output should be tested at a time for a 10ms maximum duration.

**TIMING REQUIREMENTS (Input t<sub>r</sub> = t<sub>f</sub> = 3ns)**

PARAMETER	SYMBOL	TEST CONDITION	V <sub>CC</sub> (V)	Ta = 25°C	Ta = -40~85°C	UNIT
				LIMIT	LIMIT	
Minimum Pulse Width (CK)	t <sub>w</sub> (L) t <sub>w</sub> (H)		5.0 ± 0.5	5.0	5.0	ns
Minimum Pulse Width (CLR)	t <sub>w</sub> (L)		5.0 ± 0.5	5.0	5.0	
Minimum Set - up Time (SL, SR, A~H)	t <sub>s</sub>		5.0 ± 0.5	3.5	3.5	
Minimum Set - up Time (S0, S1)	t <sub>s</sub>		5.0 ± 0.5	6.0	6.5	
Minimum Hold Time (SL, SR, A~H)	t <sub>h</sub>		5.0 ± 0.5	2.0	2.0	
Minimum Hold Time (S0, S1)	t <sub>h</sub>		5.0 ± 0.5	0.0	0.0	
Minimum Removal Time (CLR)	t <sub>rem</sub>		5.0 ± 0.5	2.0	2.0	

**AC ELECTRICAL CHARACTERISTICS (  $C_L = 50\text{pF}$ ,  $R_L = 500\Omega$ ,  $t_r = t_f = 3\text{ns}$  )**

PARAMETER	SYMBOL	TEST CONDITION	Ta = 25°C			Ta = -40~85°C		UNIT	
			V <sub>CC</sub> (V)	MIN.	TYP.	MAX.	MIN.		MAX.
Propagation Delay Time (CK-QA', QH')	t <sub>pLH</sub> t <sub>pHL</sub>		5.0 ± 0.5	—	7.2	10.5	1.0	12.0	ns
Propagation Delay Time (CLR-QA', QH')	t <sub>pHL</sub>		5.0 ± 0.5	—	6.0	10.0	1.0	11.5	
Propagation Delay Time (CK-QA~QH)	t <sub>pLH</sub> t <sub>pHL</sub>		5.0 ± 0.5	—	7.4	11.4	1.0	13.0	
Propagation Delay Time (CLR-QA~QH)	t <sub>pHL</sub>		5.0 ± 0.5	—	6.3	10.5	1.0	12.0	
Output Enable Time	t <sub>pZL</sub> t <sub>pZH</sub>		5.0 ± 0.5	—	7.4	11.4	1.0	13.0	
Output Disable Time	t <sub>pLZ</sub> t <sub>pHZ</sub>		5.0 ± 0.5	—	7.2	9.6	1.0	11.0	
Maximum Clock Frequency	f <sub>MAX</sub>		5.0 ± 0.5	80	120	—	80	—	MHz
Input Capacitance	C <sub>IN</sub>			—	5	10	—	10	pF
Bus Input Capacitance	C <sub>I/O</sub>			—	13	—	—	—	
Power Dissipation Capacitance	C <sub>PD</sub> (1)			—	160	—	—	—	


Note (1) C<sub>PD</sub> is defined as the value of the internal equivalent capacitance which is calculated from the operating current consumption without load.

Average operating current can be obtained by the equation:

$$I_{CC}(\text{opr}) = C_{PD} \cdot V_{CC} \cdot f_{IN} + I_{CC}$$


**DIP 20PIN OUTLINE DRAWING ( DIP20-P-300A )**

Unit in mm

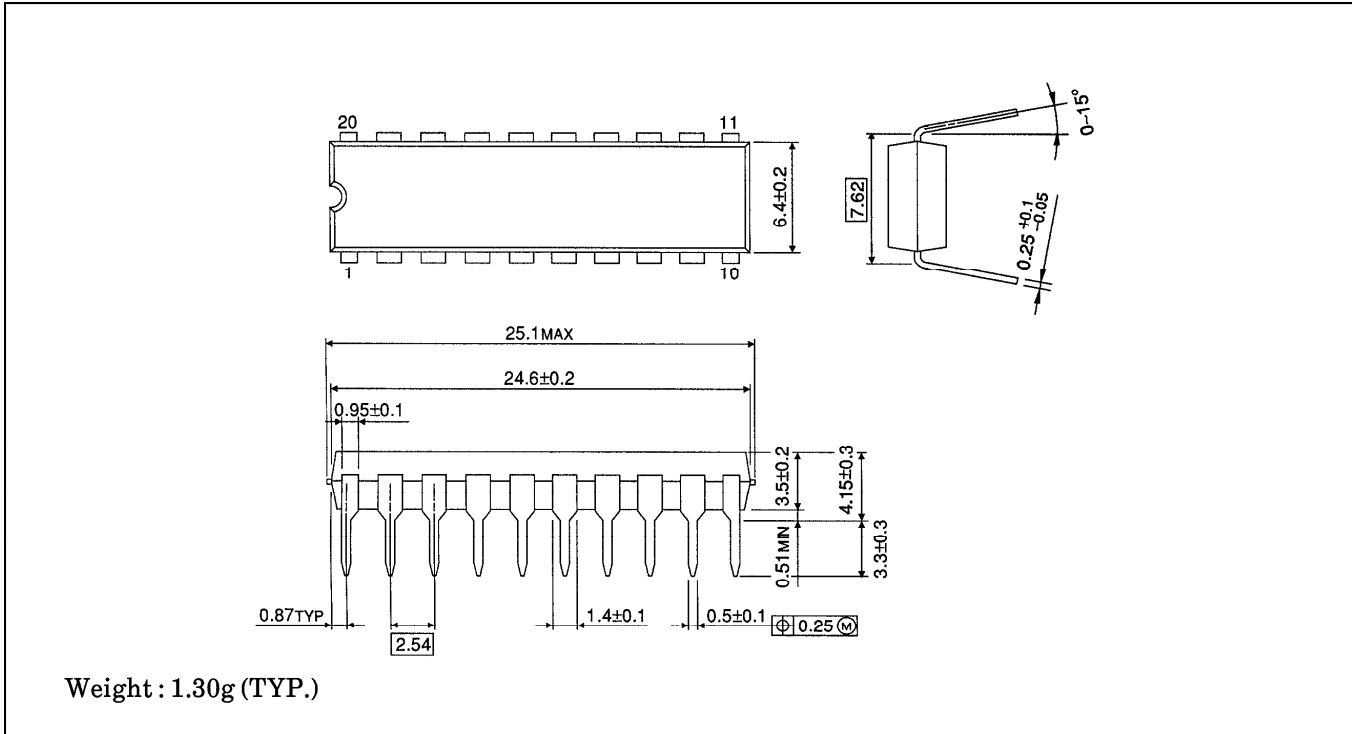


**SOP 20PIN ( 200mil BODY ) OUTLINE DRAWING ( SOP20-P-300 )**

Unit in mm

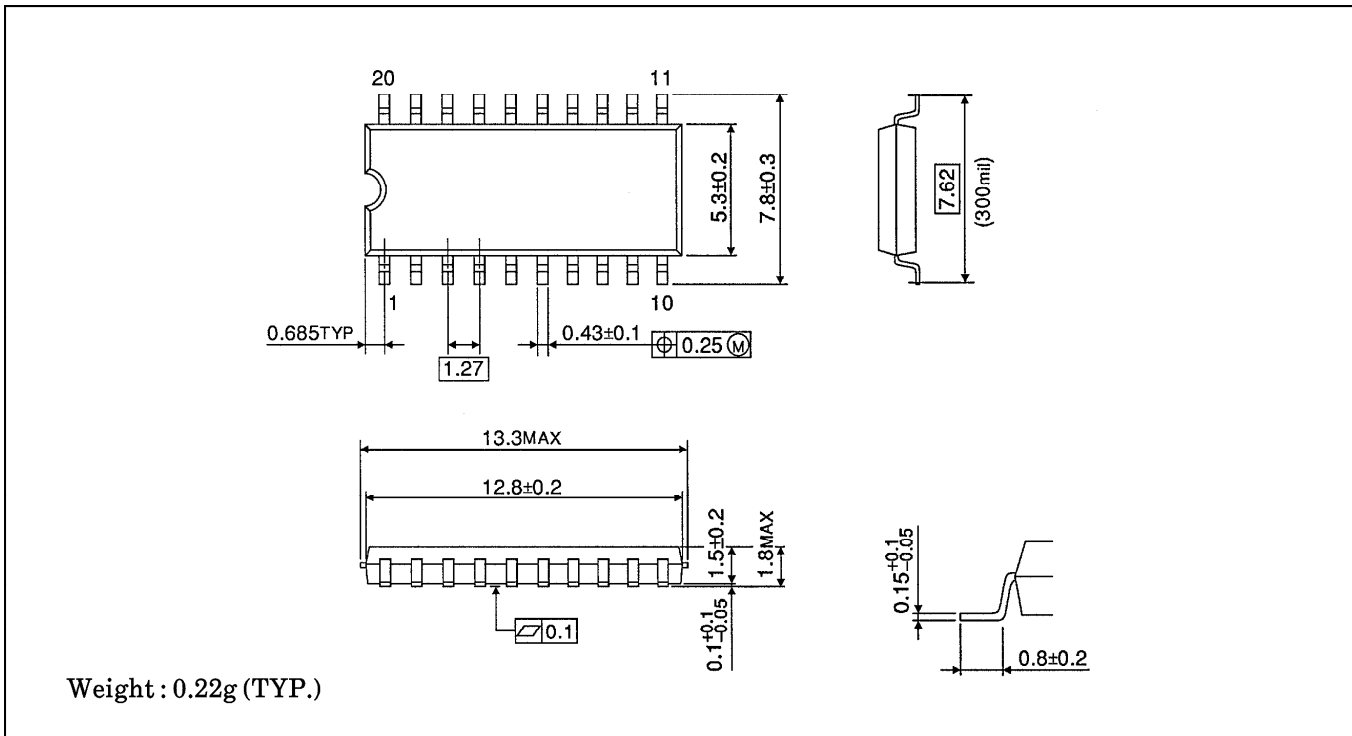

SOP 20PIN (300mil BODY) OUTLINE DRAWING (SOL20-P-300)

Unit in mm

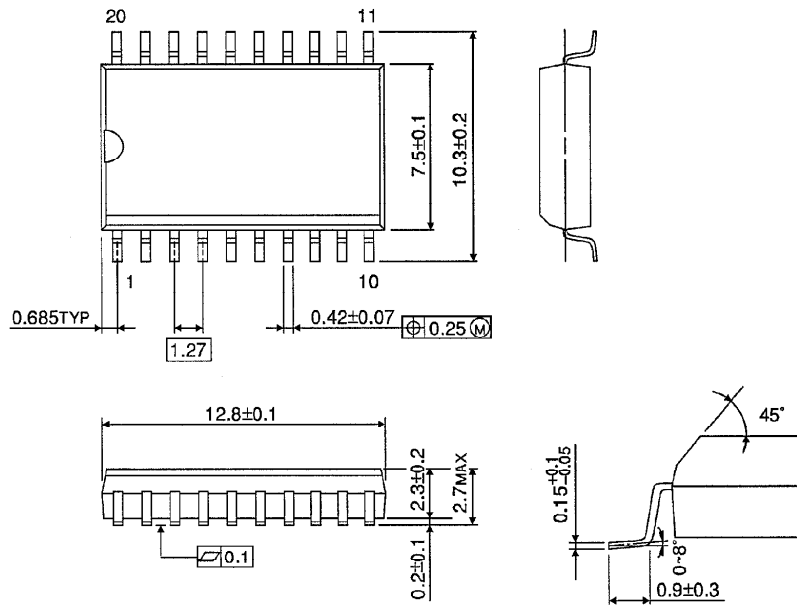

Weight : 0.46g (TYP.)