


RELEASE FOR PUBLICATION **MARCH 5**, 1991
 BY AMP INCORPORATED. ALL RIGHTS RESERVED.

THIS DRAWING IS UNPUBLISHED.
 © COPYRIGHT 1990

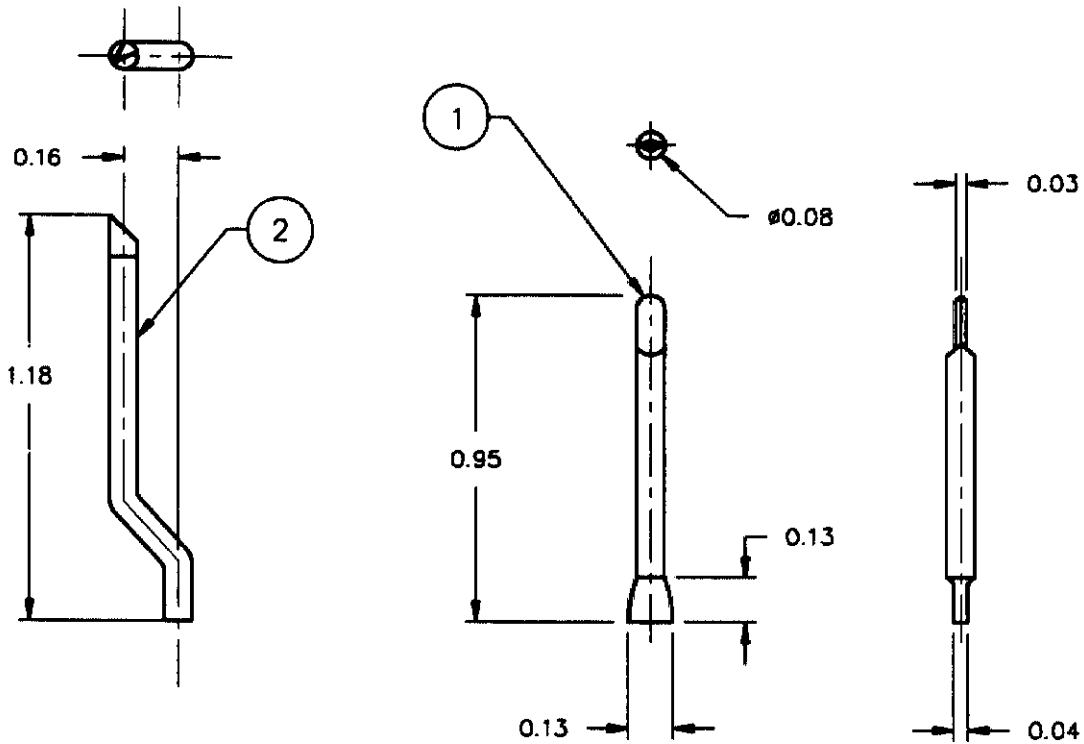

NOTES:

1. PACKAGED 3 BLADES PER POLYBAG WITH INSTRUCTION SHEET 9688.
2. LABEL TO READ AMP AND PART NUMBER.
3. SHIPPING WEIGHT OF 3 BLADES PACKAGE 0.75oz.

606701-4	BLADE FOR 606700-1 (OBSOLETE)	
606701-3	BLADE FOR 606700-3	2
606701-2	LABEL FOR PACKAGE (OBSOLETE)	
606701-1	BLADE FOR 606700-1	1

EC	D	DWG SIZE		PART No.	DESCRIPTION	ITEM
DIST	1	REVISION OF EACH ASSY NO. (WHEN BLANK, USE DWG REVISION)				
QTY. REQ'D. PER ASSY.		PARTS LIST				
		MATERIAL	HEAT TREAT	FINISH		
		TOOL STEEL	NA	BLK. OXIDE		
		DIMENSIONS ARE IN INCHES		DRAWN BY:	DATE:	APPROVED BY:
		TOLERANCES UNLESS OTHERWISE SPECIFIED:		MIDDLETOWN CAD	2-24-91	
		2 PL DEC ±.02		CHECK BY:	RELEASE:	
		3 PL DEC ±.005			J. Flannery 3-5-91	
		4 PL DEC ±.0005		AMP AMP INCORPORATED		
		ANGLES ±0° 30'		Harrisburg, Pa.		
		FRACTIONS ±1/64		NAME: REPLACEMENT BLADE FOR 606700		
		SURF TEXTURE: REMOVE BURRS, BREAK SHARP EDGES, .015 R. MAX.				
		D	ECN 020191 CAD	FH	2/91	
P	F	LTR	REVISION RECORD	APP	DATE	
SCALE: NTS		DRAWING No.: 606701		SHEET: 1 OF 1		REV.: D