DRAWING MADE IN THIRD ANGLE PROJECTION

THIS DRAWING IS UNPUBLISHED. | RELEASED FOR PUBLICATION .19 .

© COPYRIGHT 19 BY AMP INCORPORATED, HARRISBURG, PA. ALL INTERNATIONAL RIGHTS RESERVED. AMP PRODUCTS MAY BE COVERED BY U.S. AND FOREIGN PATENTS AND/OR PATENTS PENDING.

LOC	DIST	P	F
AR	39		

REVISIONS

ZONE	LTR	DESCRIPTION	DATE	APPD
	C	REVISED & REDRAWN ECN-0957	-	-
	D	REV PER ECN 1297	1-30-87	JP SW
	D1	REVISED ECN-CF-1577	2-24-88	-
	E	REVSD/ECN CF-1706	07/88	DH
F	F	REV PER ECN CF1823	4/25/89	KTH

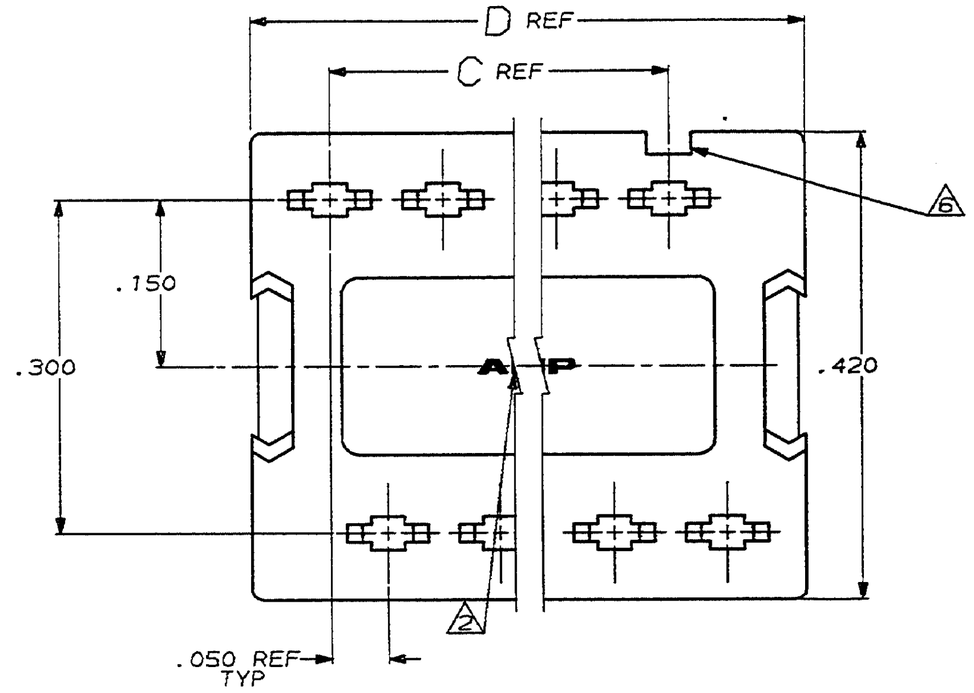

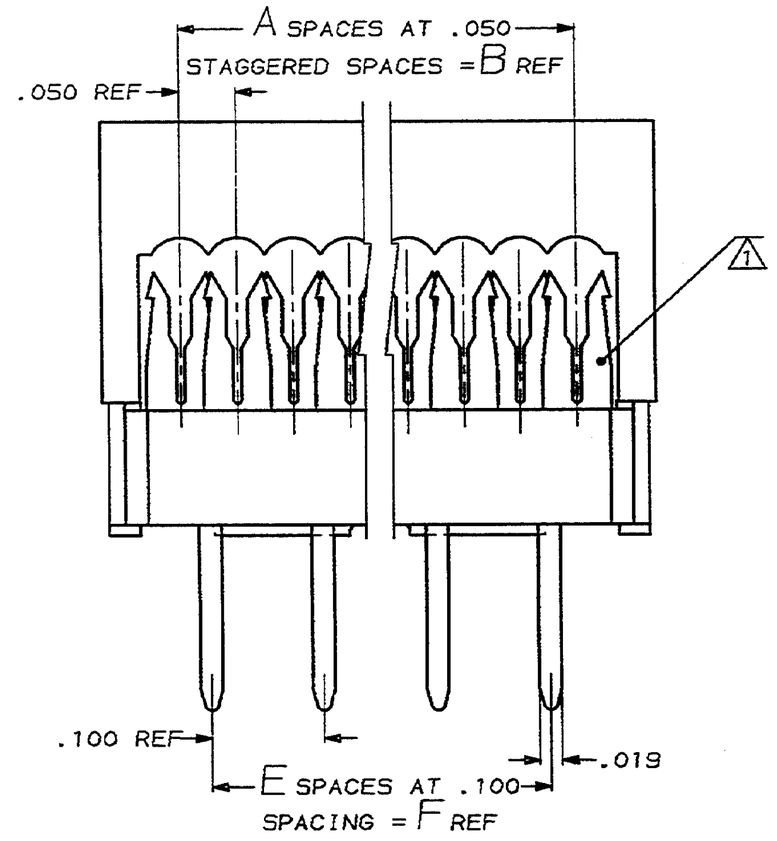

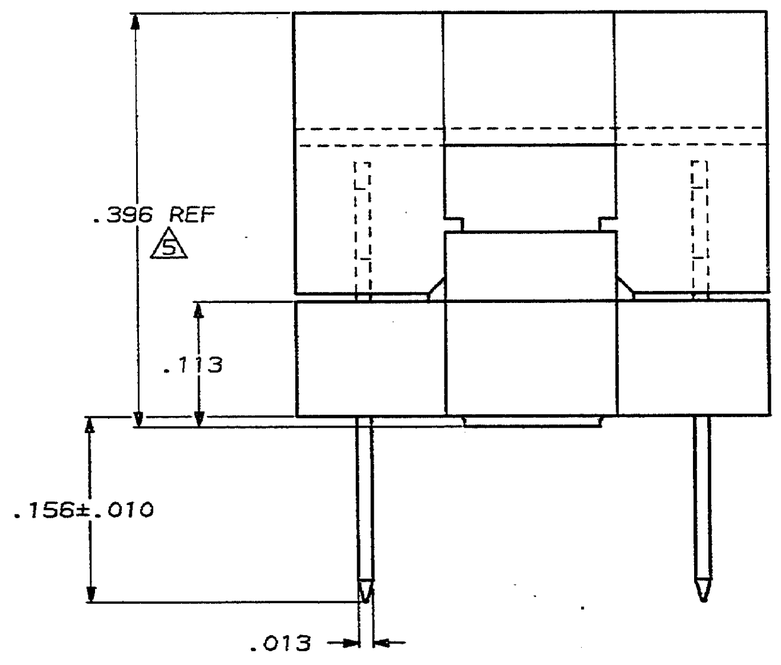

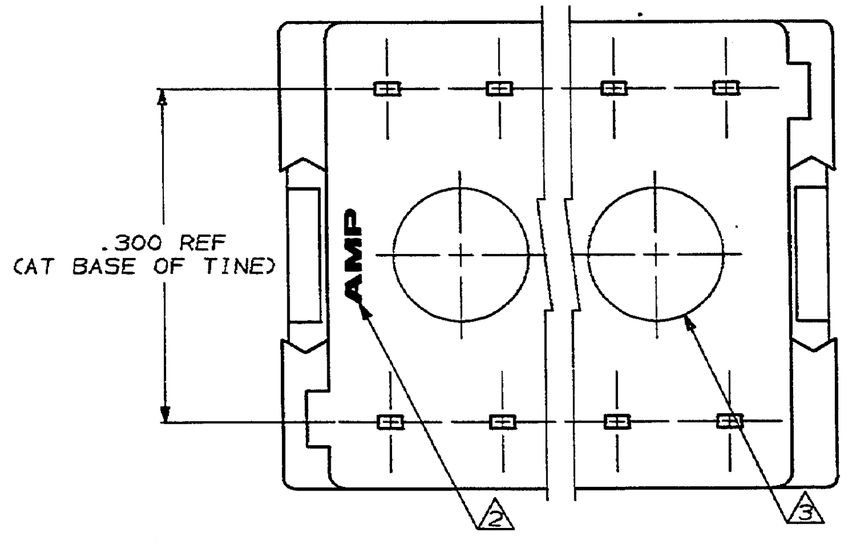

1. CONTACTS DESIGNED FOR 28 AWG STRANDED OR 26,28, & 30 AWG SOLID WIRE.
2. AMP TRADEMARK LOCATED IN APPROX AREA SHOWN.
3. STANDOFFS: POSN 8 (2) STANDOFFS AS SHOWN.
   POSN 14-20 (3) STANDOFFS, (1) CENTERED BETWEEN (2) SHOWN
4. .000100-.000200 BRIGHT TIN LEAD OVER .000050 NICKEL ON ENTIRE CONTACT.
5. HEIGHT AFTER TERMINATION IS .253 REF.
6. INDICATES NO 1 POSITION.

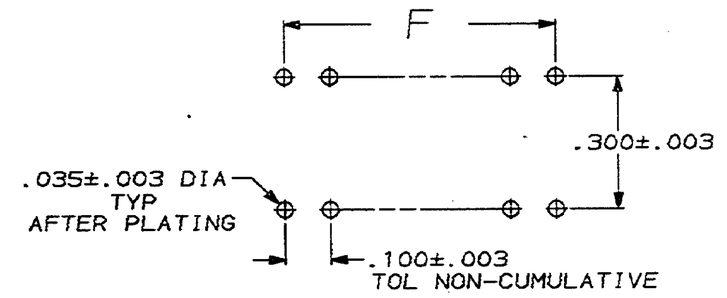

RECOMMENDED HOLE LAYOUT

.900	9	1.088	.900	.950	19	20	746613-5
.800	8	.988	.800	850	17	18	-4
.700	7	.888	.700	.750	15	16	-3
.600	6	.788	.600	.650	13	14	-2
.300	3	.488	.300	.350	7	8	746613-1
F	E	D	C	B	A	NO OF POSN	PART NO

UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES
TOLERANCES ON :
2 PL DEC ±-
3 PL DEC ±.005
ANGLES ±-

MATERIAL
MOLDED PARTS, 94V-0 RATED THERMOPLASTIC, COLOR-BLACK
CONTACTS, PHOS BRONZE

FINISH
CONTACTS: 4

DR W.E. ZELKO	1-10-86
CHK J. PEACHEY	1-8-86
APPD H. SCULLY	1-10-86
APPD D. HOFFMAN	1-10-86
PRODUCT SPEC	108-40013
APPLICATION SPEC	114-40005
WEIGHT	-

AMP | AMP INCORPORATED Harrisburg, Pa. 17105

NAME
KIT, AMP-LATCH DIP PLUG,
PREASSEMBLED .100 X .300 CENTERS,
FULL TIN PLATED CONTACTS

SIZE	FSCM NO	DRAWING NO
D	00779	746613

SCALE NTS | SHEET - OF -

CUSTOMER DRAWING